


How to operate your lock

To lock

Step 1: Insert the Adapter into D-Sub (Com. Port, VGA Port) and tighten the screw

Step 2: To lock up, place the lock housing into the screw and press down the key while turning it in 90° counterclockwise.

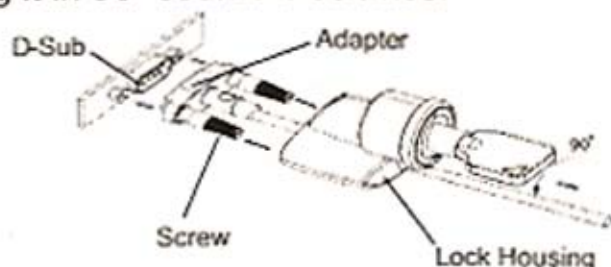


To unlock


Step 1: Insert the key into the keyhole and press it down while turning it 90° clockwise.

Step 2: Pull out the lock from the adapter.


Step 3: To complete unlocking, loosen the screw and pull the adapter out of D-Sub.

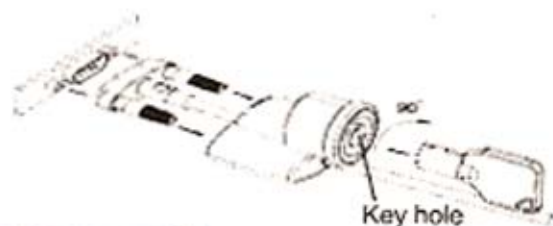

Installation Instructions

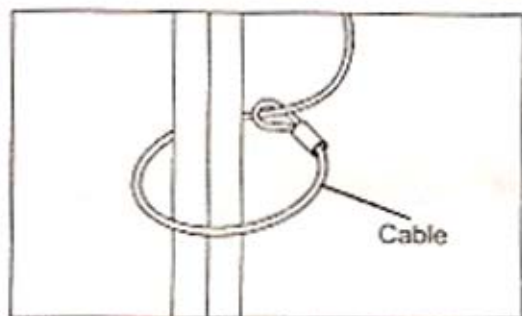

Option 1: Secure the cable on the table rest.

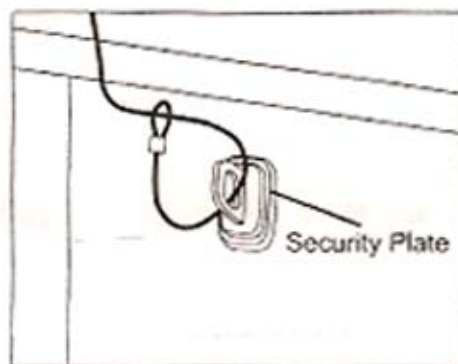

Option 2: To finish the installation, place the security plate on a secured object and pull the cable through the hole of the plate.

- Before installing the security plate, be sure to clean the sticking spot of the plate with a piece of scrubbing cloth or towel and remove the 3M back sticker before placing it on a secured and safe spot and then tighten the screw.