



Parts Description:

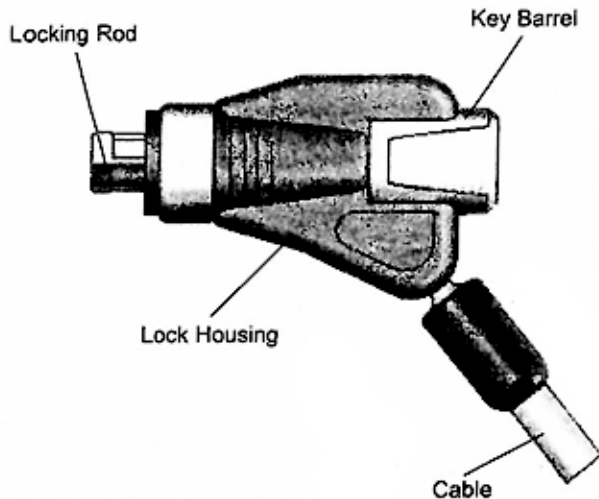

Lock Slot Specification:

1. This lock is designed to fit rectangular locking slots with a minimum dimension of 7mm x 3mm and a maximum dimension of 7mm x 3.6mm.

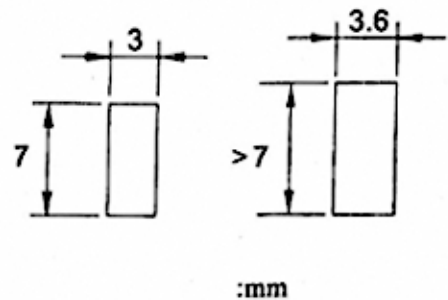

Installation:

1. Find an immovable object (ex: table or anchor) to loop the cable and lock head through (Figure 1)
2. Insert the key into the lock barrel and turn the key clockwise 90 degrees (Figure 5/6). Hold the lock head (Figure 2) and insert the locking rod into the locking slot on your device (Figure 3/4). The key barrel will self engage with your applied pressure, make sure you have a tight fit and the lock is engaged, and turn the key counter clockwise and remove. Your device should now be secure.




Figure 1



Figure 2



Figure 3




Figure 4




Figure 5



Figure 6



Figure 7



Figure 8

Removal:

1. Insert the key into the lock barrel and turn the key clockwise 90 degrees (Figure 5/6).
2. Hold the key barrel and while pulling back wiggle the lock. (The key barrel should retract from the lock housing approximately 5.5 and 7.0mm)
3. Once your device is unlocked, unravel the cable from the immovable object.

NOTE:

The key can only be removed from the lock when it's in the locked position (Figure 8). Do not attempted to remove the key when the lock is not in the locked position or damage to the key may occur. (Figure 7)